




Zenith Z-985 Replica Battery Box for Use with abbattery

Instructions

1. Disconnect your radio battery connector from the **abbattery** power supply.
2. If you have a B600 dial light or 8G005 filament connected to the small connector at the side of the box, disconnect it, too.
3. Remove the **abbattery** from the radio
4. Carefully remove the **abbattery power pack** from the original box and place it in your new Zenith Z-985 replica battery box. The **abbattery** connector should line up with the hole in the box.



5. If you have a B600 or 8G005, pass the small connector through the small hole in the end panel and reconnect it to the two-pronged OEM connector attached to your radio. Note that one pin is larger than the other. *Note: The small connector must be connected to the small OEM connector in order for the 8G005 series radios to operate as this supplies an additional 1.5v to the filament circuit.*
6. Slide the Zenith Z-985 battery box completely into the battery compartment and reconnect the radio's large battery connector to the **abbattery** power supply. Make sure you align the pins correctly. It should only fit one way. Do not force.

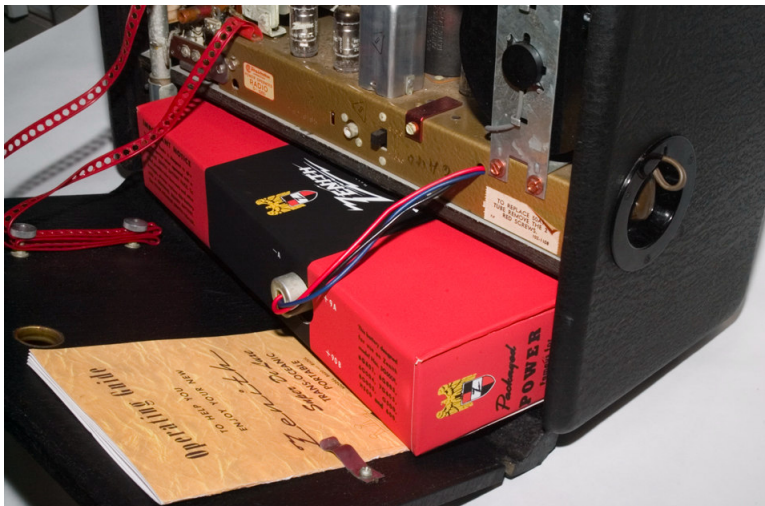

7. Switch the radio to the AM band and turn it on.

If the radio does not play within a few seconds, turn the radio off and refer to the original instructions that came with your abbattery pack.

These instructions are available online in .pdf format at
www.edsantiqueradios.com